



Shurtape®

TRUE TO YOUR WORK®

2017 - 2018

PRODUCT CATALOG

THE ONLY JOB WORTH DOING IS A JOB WELL DONE



SHUFORD MILLS DE • HIGHLAND PLANT

Headquartered in Hickory, NC, Shurtape Technologies, LLC, is a privately owned, fifth generation, global corporation that designs, develops, manufactures and distributes pressure-sensitive tapes that make our customers' lives easier and help them do their jobs better.

We're an established company in continuous operation since 1880. We have a history of entrepreneurship and innovation, from spinning cotton, yarn and twine to making high-quality, high-performing tapes today.

Shurtape brand was introduced in 1955 when we began manufacturing tapes, with a focus on solutions for those with the highest, most exacting standards. Today, we proudly serve a variety of markets, including packaging, building and construction, abatement, professional paint, stucco, electrical, HVAC, industrial, maintenance, repair and operations (MRO), arts and entertainment, and transportation.

No matter the job, it's critical you're prepared. Shurtape has you covered with the tapes you trust – and the product features you demand – to deliver superior results.

Today, Shurtape Technologies, LLC's global manufacturing, distribution and service capabilities position us to satisfy the growing needs of an international audience searching for competitively priced, high quality tape solutions, with international locations in

Canada

Mexico

Peru

The United Kingdom

Germany

The Middle East

Asia

Shurtape[®]
TRUE TO YOUR WORK[™]

shurtape[®]



OUR MISSION
BE TRUE TO YOUR WORK

S
T
R
E
T
M
E
N
T
C
O

MASKING & PAPER TAPES	2
Painter's Tapes	4
General Purpose Masking Tapes	6
Performance Masking Tapes	7
Flatback Paper Tapes	8
Specialty Tapes	9
PACKAGING SOLUTIONS	10
Hot Melt Tapes	12
Specialty Hot Melt Tapes	13
Printed Hot Melt Tapes	14
Printable Hot Melt Tapes	14
Water-Based Acrylic Tapes	15
Water Activated Tapes	16
Strapping Tapes	17
Solvent-Based Acrylic Tapes	18
Office & Specialty Tapes	19
ShurSEAL® Packaging Solutions	20
ShurSEAL® Tape Applicators	21
Tape Applicators	22
CLOTH & DUCT TAPES	24
General Purpose Duct Tapes	26
All-Purpose Duct Tapes	28
Abatement Duct Tapes	29
Stucco Duct Tapes	30
HVAC Duct Tapes	31
Heavy Duty Duct Tapes	32
Specialty Duct Tapes	33
Coated Cloth Tapes	34
FOIL, FILM & FOAM TAPES	36
Aluminum Foil Tapes	38
Composite Tapes	40
Electrical Tapes	41
Polyethylene/PVC Film Tapes	42
Specialty Tapes	43
DOUBLE-COATED TAPES	44
Double-Coated Paper Tapes	46
Double-Coated Film Tapes	47
Double-Coated Cloth Tapes	47
Transfer Adhesive Tapes	48
Dispenser	48
PRODUCT INNOVATIONS	49
APPLICABLE STANDARDS	50
LOCATIONS	50
PRODUCT INDEX	51
WARRANTY	51



MASKING & PAPER TAPES

WE KNOW YOUR TIME IS VALUABLE. That's why our masking and paper tapes are engineered to meet the demands of a range of jobs. Whether you require tensile strength, temperature resistance, removability, flexibility or sharp paint lines, **SHURTAPE DELIVERS.**

PAINTER'S TAPES

CF 120



FROGTAPE® MULTI-SURFACE MEDIUM ADHESION RUBBER-BASED ADHESIVE EXCLUSIVE PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	5.7
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	-
APPLICABLE STANDARDS*	15

For interior or exterior use on multiple surfaces, including cured painted walls, wood trim, glass and metal; Withstands direct sunlight for up to 7 days.



CF 160



FROGTAPE® DELICATE SURFACE LOW ADHESION ACRYLIC-BASED ADHESIVE EXCLUSIVE PAINTBLOCK® TECHNOLOGY

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	14
THICKNESS (MILS)	3.6
ELONGATION (%)	4.5
MAXIMUM SERVICE TEMPERATURE (°F)	-
APPLICABLE STANDARDS*	-

For interior use on freshly painted surfaces (24 hours old), faux finishes, primed wallboard and wallpaper.



CP 27®



PREMIUM GRADE, SHURRELEASE® MEDIUM ADHESION SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.6
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	-

For interior and exterior use on multiple surfaces, including painted walls, glass, vinyl, metal and wood; Not recommended for use on wallpaper, unpainted wallboard, ceiling tile or with uncured coatings.



CP 150



PAINTER'S MATE GREEN® MEDIUM ADHESION RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.4
ELONGATION (%)	12
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For interior use on painted walls, woodwork, glass, metal and vinyl.



CP 60®



PREMIUM GRADE, RAZOREDGE® LOW ADHESION ACRYLIC-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	14
THICKNESS (MILS)	3.6
ELONGATION (%)	4.5
MAXIMUM SERVICE TEMPERATURE (°F)	-
APPLICABLE STANDARDS*	-

For painting stripes, diamonds and other patterns on walls; For interior use on delicate surfaces such as painted drywall and faux finishes.



CP 27®

PAINTER'S TAPES

COL 00



PREMIUM GRADE, COLONIAL® HIGH ADHESION RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	15

For industrial and automotive paint applications that do not require the use of a bake oven; Can also be used for general purpose masking applications that demand a premium performance tape.

CP 66®



CONTRACTOR GRADE HIGH ADHESION RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	5.4
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For residential and commercial painting and construction, industrial masking, holding and packaging; Use in applications that demand quick stick and conformability to irregularly shaped surfaces.

CP 102



INDUSTRIAL GRADE MEDIUM-HIGH ADHESION RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	5.4
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	15

For the industrial, commercial and residential paint markets for use on vinyl, metal, glass, plastic and rubber.

CP 107



INDUSTRIAL GRADE MEDIUM-HIGH ADHESION SYNTHETIC RUBBER-BASED ADHESIVE

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS (MILS)	4.9
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For non-critical painting and industrial applications that demand good adhesion, quick stick and clean removal; Also used for general purpose packaging, bundling, holding, splicing and tabbing; For use on vinyl, glass, plastic and rubber.



CP 102

GENERAL PURPOSE MASKING TAPES

CP 105



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	4.6
ELONGATION (%)	7
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For non-critical bundling and labeling applications; Also used for general purpose packaging, holding and splicing applications for home, school and industry.

CP 106



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	42
THICKNESS (MILS)	4.8
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For packaging, bundling, holding, splicing, masking and labeling applications.

CP 101



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
BLENDED RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	4.9
ELONGATION (%)	9.5
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For bundling, packaging, holding, splicing, masking and labeling for home, school and industry.

PERFORMANCE MASKING TAPES

CP 400



**HIGH PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	5.7
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	200
APPLICABLE STANDARDS*	15

For moderate temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.

CP 450



**HIGH PERFORMANCE GRADE
MODERATE TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS (MILS)	6.9
ELONGATION (%)	10
MAXIMUM SERVICE TEMPERATURE (°F)	225
APPLICABLE STANDARDS*	15

For moderate temperature, demanding paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for wet sanding applications; Recommended for indoor use only.

CP 500



**HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
THICKNESS (MILS)	5.8
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	300
APPLICABLE STANDARDS*	15

For high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for wet sanding applications; Recommended for indoor use only.

CP 83



**UTILITY GRADE
HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	49
THICKNESS (MILS)	5.0
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	15

For general purpose packaging, bundling, holding, splicing, tabbing and banding applications involving a variety of substrates; Not recommended for exacting industrial masking, spray painting or oven baking applications.

CP 631



**GENERAL PURPOSE GRADE
MEDIUM-HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	4.9
ELONGATION (%)	9
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	5, 15

For general purpose labeling, color-coding, decorating and identification; Can also be used for packaging, bundling, binding, holding, splicing and banding applications.



CP 105

CP 650



**HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS (MILS)	6.6
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	325
APPLICABLE STANDARDS*	1, 15

For demanding, high temperature paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Also used for metal preparation, painting, coating and gel coat masking; Recommended for indoor use only.

CF 740



**HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
MEDIUM-HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	39
THICKNESS (MILS)	6.3
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	15

For high temperature, demanding industrial paint masking applications in the transportation (auto, coaches, buses and marine) and metal fabrication industries; Also used for EPDM rubber insulation protection; Recommended for indoor use only.

CP 905



**HIGH PERFORMANCE GRADE
HIGH TEMPERATURE
EXCELLENT ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	41
THICKNESS (MILS)	6.4
ELONGATION (%)	11
MAXIMUM SERVICE TEMPERATURE (°F)	350
APPLICABLE STANDARDS*	15

For high temperature - up to 350 F - paint masking and metal fabrication applications in the transportation (auto, coaches, buses and marine) industry; Recommended for indoor use only.

FLATBACK PAPER TAPES

FP 115



**HIGH PERFORMANCE GRADE
REINFORCED FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (*F)	120
APPLICABLE STANDARDS*	16

For industrial splicing, start-up, tabbing, shingling and overlapping applications; Effectively secures the paper to the core during roll start-up, holds the splice during processing and anchors the end of the roll securely.



FP 115

FP 97



**GENERAL PURPOSE GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	35
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	110
THICKNESS (MILS)	6.0
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	16, 28, 29, 30, 31

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding, patching and floor seaming applications; FDA compliant.

FP 96



**PACKAGING GRADE
KRAFT FLATBACK PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	6.1
ELONGATION (%)	6
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	16

For hand and machine carton sealing; Used for splicing various substrates; Also used for general purpose packaging, binding, holding, tabbing, reinforcing, banding and patching applications.

FP 202



**PACKAGING PREMIUM GRADE
HEAVY DUTY, BLEACHED KRAFT PAPER
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	55
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	63
THICKNESS (MILS)	7.5
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (*F)	180
APPLICABLE STANDARDS*	13, 16

For splicing various substrates; Used for heavy duty hand and machine carton sealing applications; Used for general purpose applications where a thick, flatback paper tape is required.

FLATBACK PAPER TAPES

FP 17



**PRINTABLE, LOW TEMPERATURE
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	52
THICKNESS (MILS)	5.4
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	16

For general purpose packaging, bundling, holding, binding, splicing, labeling, color-coding, banding, decorating and identification.

FP 227



**PRINTABLE
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	57
THICKNESS (MILS)	5.8
ELONGATION (%)	2.5
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	5, 16

For full-web flexographic printing equipment or hand-labeling applications.

**Fluorescent colors do not conform to ASTM D-4236



FP 726



**PRINTABLE, HIGH-STRENGTH
HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	72
THICKNESS (MILS)	6.6
ELONGATION (%)	3
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	5, 16

For identification labeling, color-coding, packaging closure and other applications where printing is necessary.



SPECIALTY TAPES

CP 743



**SPECIALTY GRADE
PHOTOGRAPHIC BLACK
VERY HIGH ADHESION
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	47
THICKNESS (MILS)	6.5
ELONGATION (%)	8
MAXIMUM SERVICE TEMPERATURE (*F)	150
APPLICABLE STANDARDS*	15

For use in photo studios, film processing labs and home darkrooms; Recommended for use as a chart tape; Used for quality photographic reproduction work, including cropping and edging negatives for contact printing; Also used for sealing camera bellows and film holders against light leaks.

CP 327



**PREMIUM GRADE
MULTI-SURFACE CONTAINMENT TAPE
EXCELLENT ADHESION
SYNTHETIC RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	36
THICKNESS (MILS)	6.0
ELONGATION (%)	7.5
MAXIMUM SERVICE TEMPERATURE (*F)	200
APPLICABLE STANDARDS*	-

For building containments in restoration, remodeling, remediation and abatement jobs; Can be used on interior and exterior walls, glass, vinyl, metal and wood.



CP 327 & PC 608



PACKAGING SOLUTIONS

WE KNOW every sealing situation is unique. And we understand that keeping your lines running at peak production, while producing a better, more reliable case seal is a priority. That's why we take a holistic approach in the development of our tape and tape application technologies to deliver solutions that are purpose-built for your packaging and case sealing operations. No matter the application, we deliver **SECURE SEALS, EVERY TIME.**



ShurSEALSecure.com 1.888.444.4444

HOT MELT TAPES

HP 100®



**GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	43
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	21, 29, 32

For manual or automated industrial carton sealing of lightweight cartons with minimal exposure to handling, shipping and load stress.

HP 200®



**PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29, 32

For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

HP 300®



**PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	47
HOLDING POWER TO FIBERBOARD (MINUTES)	20,000
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29, 32

For critical closure manual or automated industrial carton sealing of medium-weight cartons that are subjected to increased handling stress.

HP 400®



**HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	25,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 11, 21, 29, 32

For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; Can be used in moderate to severe handling environments.

HP 500®



**HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	30,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 11, 21, 29, 32

For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.

HP 800



**HEAVY DUTY GRADE
50 MICRON POLYESTER FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	54
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
HOLDING POWER TO FIBERBOARD (MINUTES)	35,000
THICKNESS (MILS)	3.4
ELONGATION (%)	130
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 9, 10, 21, 29, 33

For manual or automated industrial carton sealing of heavy duty, critical closure cartons, including military supplies, high-value electronic components and hazardous materials and chemicals.

SPECIALTY HOT MELT TAPES

HP 132®



**COLD ENVIRONMENT
GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	21, 29, 32

For manual or automated industrial sealing of lightweight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



COLD TEMP

HP 232®



**COLD ENVIRONMENT
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
HOLDING POWER TO FIBERBOARD (MINUTES)	10,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 75
SERVICE TEMPERATURE RANGE (°F)	-20 - 100
APPLICABLE STANDARDS*	21, 29, 32

For manual or automated industrial sealing of medium-weight cartons in cold temperature environments such as food processing and packaging facilities, as well as in cold weather moving/storage and unheated warehouses.



COLD TEMP

HP 235



**RECYCLED CARTONS
PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29, 32

For manual and automated industrial sealing of medium-weight, highly recycled cartons, particularly 100 percent recycled.



FE-2 DISPENSER & HP 200®

PRINTED HOT MELT TAPES

HP 240



**PRODUCTION GRADE
STANDARD MESSAGE PRINT
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29, 32

Printed with standard messages to prevent pilferage or inform handlers of care; For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

HP 250



**PRODUCTION GRADE
CUSTOM PRINT
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29

Custom-printed to prevent pilferage and allow personalization of outgoing cartons; For manual or automated industrial carton sealing of medium-weight cartons in normal manufacturing and shipping environments.

PRINTABLE HOT MELT TAPES

HP 260



**PRODUCTION GRADE
30 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	44
HOLDING POWER TO FIBERBOARD (MINUTES)	15,000
THICKNESS (MILS)	1.9
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21, 29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual sealing of medium-weight cartons in normal manufacturing and shipping environments; May also be used in automated industrial carton sealing applications.

HP 460



**HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
HOLDING POWER TO FIBERBOARD (MINUTES)	25,000
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 21

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of large, bulky or heavy content cartons; For use in higher speed, critical closure applications; For use in moderate to severe handling environments.

HP 560



**HEAVY DUTY GRADE
50 MICRON CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	42
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
HOLDING POWER TO FIBERBOARD (MINUTES)	30,000
THICKNESS (MILS)	3.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	35 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 150
APPLICABLE STANDARDS*	4, 11, 21

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For manual or automated industrial carton sealing of heavy, bulky cartons, including overstuffed or under-filled cartons, in high stress and extreme handling conditions.

GS 496



**PRODUCTION GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED**

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For use on Siat L33, L36, L233 (or equivalent) surface printing presses; For general purpose strapping, packaging, bundling and palletizing applications.

WATER-BASED ACRYLIC TAPES

AP 101®



**GENERAL PURPOSE GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	18
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For non-critical closure of lightweight cartons in manual and automated industrial sealing settings.



AP 301®



**PERFORMANCE GRADE
35 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of medium-weight cartons in extreme temperature environments or subjected to handling stress.



AP 180®



**PRODUCTION GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	21
THICKNESS (MILS)	1.8
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of lightweight cartons.



AP 401®



**HIGH PERFORMANCE GRADE
40 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	27
THICKNESS (MILS)	2.5
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For heavy duty manual and automated industrial sealing of cartons exposed to rough handling and load stress; Also used for critical closure of bulky packages.



AP 201®



**PRODUCTION GRADE
28 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	2.0
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For manual and automated industrial sealing of light-to medium-weight cartons.



**SD 932 DISPENSER &
AP SERIES**

WATER ACTIVATED TAPES



GP 100
MEDIUM DUTY GRADE
NON-REINFORCED KRAFT PAPER
WATER ACTIVATED ADHESIVE

PAPER SHEET (LBS)	60
MD TENSILE (LBS/IN WIDTH)	45
CD TENSILE (LBS/IN WIDTH)	23
APPLICABLE STANDARDS*	-

For light- to medium-weight packaging applications such as inner carton sealing or palletized loads.



WP 100
ECONOMY GRADE
REINFORCED KRAFT PAPER
(MD) H110/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	55
CD TENSILE (LBS/IN WIDTH)	25
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	5/8
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing light- to medium-weight cartons up to 25 lbs with normal exposure to handling, shipping and load stress.



WP 200
PRODUCTION GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	60
CD TENSILE (LBS/IN WIDTH)	27
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	1/2
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing medium-weight cartons up to 35 lbs in normal manufacturing and shipping environments; Ideal for single parcel shipments.



WP 300
HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	75
CD TENSILE (LBS/IN WIDTH)	30
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	2-1-1-1-1-2
MD SPACING (IN)	7/16
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For critical closure of heavy-weight cartons up to 45 lbs in all environments; Ideal for single parcel shipments.



WP 400
EXTRA HEAVY DUTY GRADE
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	80
CD TENSILE (LBS/IN WIDTH)	35
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	30
MD PATTERN	2-2-1-2-2
MD SPACING (IN)	19/32
CD SPACING (IN)	0.75
APPLICABLE STANDARDS*	-

For sealing large, bulky or heavy content cartons over 50 lbs in moderate to severe handling environments; Ideal for single parcel shipments.



WP 250
PRODUCTION GRADE, CUSTOM PRINT
REINFORCED KRAFT PAPER
(MD) G75/(CD) G150 FIBERGLASS
WATER ACTIVATED ADHESIVE

MD TENSILE (LBS/IN WIDTH)	60
CD TENSILE (LBS/IN WIDTH)	27
TOP SHEET (LBS)	23
BOTTOM SHEET (LBS)	23
MD PATTERN	1-1-1-1-1
MD SPACING (IN)	1/2
CD SPACING (IN)	1.25
APPLICABLE STANDARDS*	-

For sealing medium-weight cartons up to 35 lbs in normal manufacturing and shipping environments; Ideal for single parcel shipments; Custom printed with logo or message for delivery of goods without pilferage.

STRAPPING TAPES



GS 490
ECONOMY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	4.3
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For light duty strapping, packaging, bundling and palletizing applications.



GS 500
UTILITY GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	150
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For general purpose strapping, packaging, bundling and palletizing jobs.



GS 501
INDUSTRIAL GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	175
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	5.2
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	29, 32

For medium duty strapping, packaging, bundling and palletizing applications.



GS 521
HIGH PERFORMANCE GRADE
CAST BOPP FILM
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.2
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 29, 32

For heavy duty closing, strapping, packaging, bundling, unitizing, palletizing and L-Clip applications.



GS 531
PREMIUM GRADE
POLYESTER FILM (PET)
SYNTHETIC HOT MELT ADHESIVE
FIBERGLASS REINFORCED

TENSILE (LBS/IN WIDTH)	300
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	6.7
ELONGATION (%)	3.7
SERVICE TEMPERATURE RANGE (°F)	-10 - 150
APPLICABLE STANDARDS*	8, 29, 32

For heavy duty, maximum security closing, strapping, packaging, protecting, bundling, reinforcing, sealing, unitizing, palletizing and L-Clip applications.



PS 748
UTILITY GRADE
TENSILIZED, MOPP FILM
EMULSION ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	100
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	34
THICKNESS (MILS)	2.8
ELONGATION (%)	30
SERVICE TEMPERATURE RANGE (°F)	0 - 250
APPLICABLE STANDARDS*	-

For light duty strapping, packaging, bundling and palletizing applications.

SOLVENT-BASED ACRYLIC TAPES

PP 802



**PREMIUM PLUS GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.0
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	21

For light duty sealing, repairing and bundling of corrugated cartons, paper and film containers; Use with a hand-held or machine dispenser.

PP 803



**PREMIUM PLUS GRADE
30 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS (MILS)	2.2
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	21

For overlamination, label protection and carton closure applications that demand 100 percent clarity; For use in a broad range of temperatures.

PP 810



**PREMIUM GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	22
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	21

For sealing light- to medium-weight cartons in everyday shipping and handling environments; Also used for bundling and securing loose objects; Can also be used to repair corrugated cartons, paper and film containers; Use with a hand-held dispenser.

PP 815



**HEAVY DUTY GRADE
40 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	2.6
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	21

For critical sealing and repairing of corrugated containers in hot and cold environments; Use with a hand-held dispenser.



SD 935 DISPENSER & PP SERIES

OFFICE & SPECIALTY TAPES

CT 109



**GENERAL PURPOSE GRADE
CELLULOSE FILM
STATIC-FREE
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	1.7
ELONGATION (%)	18
MAXIMUM SERVICE TEMPERATURE (°F)	265
APPLICABLE STANDARDS*	19

For sealing, packaging and mending applications, particularly involving hard-to-stick-to surfaces; Also used for splicing applications.

VF 719



**ECONOMY GRADE
PRINTABLE UPVC FILM
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	13
THICKNESS (MILS)	1.9
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	23

For use with a hand dispenser to seal cartons with recycled fiber content, heavy ink coverage or rough surfaces.

AP 15



**SHIPPING GRADE
25 MICRON CAST BOPP FILM
EMULSION ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	19
THICKNESS (MILS)	1.6
ELONGATION (%)	150
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	29, 32

For protecting shipping labels and other printed surfaces against weather and handling.



JLAR



**SPECIALTY GRADE
BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	24
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	30
THICKNESS (MILS)	2.6
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For overlamination and label protection applications that demand a clear to the core tape; Also used for light duty packaging, paper repair and mending, and holding applications; Recommended for use with counter and desk dispensers.

PP 808



**GENERAL PURPOSE GRADE
UPVC FILM
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	2.1
ELONGATION (%)	60
MAXIMUM SERVICE TEMPERATURE (°F)	150
APPLICABLE STANDARDS*	-

For lightweight bag sealing, banding, bundling and packaging applications; Also used for color-coding tasks.

PP 807



**PREMIUM GRADE
25 MICRON CAST BOPP FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	23
THICKNESS (MILS)	1.8
ELONGATION (%)	140
APPLICATION TEMPERATURE RANGE (°F)	20 - 110
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For moisture-proof protection of labels and handling instructions; Also used for industrial and production laminating, joining, covering and protecting jobs.

ShurSEAL® PACKAGING SOLUTIONS

At Shurtape, we've taken a holistic approach to case sealing and developed strategic partnerships to offer packaging tapes and tape application technologies that together deliver better carton seals and packaging line efficiency. The result is ShurSEAL Packaging Solutions, manual and automated case sealing systems that combine HP Series packaging tape with PrimeLoc™ tape applicators to enhance your case sealing operations.

- Reduce material waste
- Reduce downtime
- Increase safety
- Increase content security
- Reduce maintenance costs

Learn more at
ShurSEALsecure.com

FOLDED-EDGE® TECHNOLOGY

A patented feature on the tape applicator that folds the edges of the tape as it's applied, reinforcing seal strength and creating a ready to open seal that doesn't require a knife.

- More reliable tape application results in better production throughput
- Increased seal strength at major flaps for added security
- Easy, no-knife opening reduces risk of product damage and worker injury



7000 SERIES



7000 Series Tape Applicators feature

- Easy retrofit into existing erectors and sealers
- Stainless steel wash-down ready construction
- Open design for easy threading
- Front and rear tape tab adjustments
- Good to the Core® tape for less material waste
- Consistent seals at speeds up to 200 fpm
- Multiple wipe-down points for full use of the tape's adhesive
- Available with PrimeAlert™ Tape Monitoring System

8000 SERIES (QUICK CHANGE)



The 8000 Series Quick Change Sealing System is uniquely engineered to tackle the downtime associated with slow tape roll changeovers, while offering all the benefits of the 7000 Series Applicators.

- Tape roll changes in less than 10 seconds
- Interchangeable inserts allow for easy offline threading
- Lightweight inserts reduce operator strain and lifting
- Retrofits to existing erectors and sealers
- Available with PrimeAlert™ Tape Monitoring System

Folded-Edge Hand Dispensers



The All New Folded-Edge Hand Dispensers feature

- Improved wipe-down force for tamper-evident seals
- Retractable/pivoting safety blade
- Visible tape length indicators for tab length control
- Visible markers for single-strip, straight taping guidance
- Durable, heavy duty design for long-lasting performance
- Available in 2-inch (FE-2) and 3-inch (FE-3) models

FlexPack Taping System



The All New FlexPack Taping System is designed to enhance efficiency and organization in end-of-line packaging operations. An excellent 5S addition, this stationary solution provides all the benefits of our Folded-Edge Hand Dispensers, plus:

- Interchangeable inserts allow for easy offline threading
- Wall mount or table-top mount via hard mount or c-clamp
- Utilizes machine length tape rolls

MANUAL APPLICATORS



FT 36 DISPENSER & GS SERIES

FT 36



ALL NEW - PATENTED PISTOL-GRIP FILAMENT TAPE DISPENSER 18, 24, & 36 MM WIDTH USE*

For manual packaging, L-clipping, strapping, bundling and palletizing applications.

RECOMMENDED PRODUCTS
GS Series, PS Series

*Available in 48 MM and 72 MM upon request. Contact your Shurtape Sales Representative for more information.

MANUAL APPLICATORS

SD 999



FILAMENT TAPE DISPENSER METAL-FRAMED 1 IN WIDTH USE

For manual closing, strapping, packaging, bundling and palletizing applications.

RECOMMENDED PRODUCTS
GS Series, PS Series

SD 930



ECONOMY GRADE CLAMSHELL TAPE DISPENSER HIGH-IMPACT PLASTIC 2 IN WIDTH USE

For manual packaging applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 931



LABEL PROTECTION DISPENSER HIGH-IMPACT PLASTIC 4 IN WIDTH USE

For use on packing lists, sales slips and labels.

RECOMMENDED PRODUCTS
AP 15, PP 807

SD 932



STANDARD GRADE PISTOL-GRIP TAPE DISPENSER WITH ANTI-REVERSE BAR 2 IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 934 & SD 935



PROFESSIONAL GRADE PISTOL-GRIP TAPE DISPENSER HIGH-IMPACT HANDLE, METAL FRAME 2 OR 3 IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 936



DELUXE SILENCER PISTOL-GRIP TAPE DISPENSER HIGH-IMPACT HANDLE, METAL FRAME 2 IN WIDTH USE

For manual carton sealing applications.

RECOMMENDED PRODUCTS
AP Series, HP Series, PP Series, FP 96, FP 97, FP 202, VF 719

SD 937



BAG-SEALING DISPENSER METAL-FRAMED 9 MM WIDTH USE

For single-stroke bag sealing applications.

RECOMMENDED PRODUCTS
PP 808

SD 955



DESKTOP TAPE DISPENSER HIGH-IMPACT PLASTIC 1 IN WIDTH USE

For mending and light duty splicing tasks. Use with tapes with a 1-in or 3-in inside diameter core.

RECOMMENDED PRODUCTS
CT 109

AUTOMATED APPLICATOR

SP 5000



RETROFIT TAPE HEAD POWDER COATED STEEL LEFT OR RIGHT HAND 2 OR 3 IN MODELS AVAILABLE

For industrial automated carton sealing applications; Retrofits into most common case erecting and sealing equipment.

RECOMMENDED PRODUCTS
HP Series and AP Series machine rolls



CLOTH & DUCT TAPES

WE KNOW all jobs have one thing in common: they must be done right. That's why our complete line of cloth and duct tapes is engineered to exacting specs. When easy handling, varying adhesion levels and durable construction characteristics are needed, trust Shurtape to give every job a distinctive mark of **EXCELLENCE**.

GENERAL PURPOSE DUCT TAPES



PC 460

**SHURGRIP® UTILITY GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	17
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	6.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, repairing, holding and waterproofing; Also used in the remediation/abatement industry as a gooseneck tape.



PC 589

**SHURGRIP® LIGHT DUTY
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	34, 56

For light duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; For temporary or permanent use.



For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.



GENERAL PURPOSE DUCT TAPES



PC 590

**ECONOMY GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	54
THICKNESS (MILS)	7.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For non-critical, general purpose use in packaging, bundling, sealing, seaming, repairing, holding and waterproofing; Also used in the remediation and restoration industries.



PC 595

**GENERAL PURPOSE GRADE
GOOD CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	8.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	38, 56

For non-critical, general purpose packaging, bundling, sealing, seaming, repairing, holding and waterproofing; Also used in plumbing applications and in the remediation and restoration industries.



PC 593

**SHURGRIP® MEDIUM DUTY
GOOD SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	85
THICKNESS (MILS)	8.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	34, 56

For medium duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



PC 599

**SHURGRIP® HEAVY DUTY
EXCELLENT SHEAR AND ADHESION
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS (MILS)	9.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	35 - 200
APPLICABLE STANDARDS*	34, 56

For heavy duty sealing, seaming, repairing, holding and waterproofing applications that require aggressive stick and superior hold; Also used in the restoration industry; For temporary or permanent use.



PC 600S

**ALL-PURPOSE GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	5

For general purpose use in industrial, carpet, plumbing, HVAC, sealing, waterproofing, patching, remediation and restoration applications.



PC 600C

**ALL-PURPOSE GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For general purpose use in industrial, plumbing, carpet, color-coding and splicing applications, as well as home and general repair applications, particularly where a discreet fix is needed.



PC 589

PC 599

ALL-PURPOSE DUCT TAPES

PC 618S



**PERFORMANCE GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42, 56

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



PC 618C



**PERFORMANCE GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	17
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	42, 56

For holding, securing, seaming, repairing, bundling, splicing, packaging and masking in HVAC, industrial, commercial, utilities, trucking and automotive applications; Can also be used as a condensation barrier in appliance assemblies.



PC 619



**SPECIALTY GRADE
CONFORMABLE
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	5

For general use, including color-coding, labeling, floor marking and book-binding; Also used for stage preparation in the motion picture and audio/visual industries; Can also be used for a variety of applications in the hospitality, motorsports and floral industries.



ABATEMENT DUCT TAPES

PC 608



**CONTRACTOR GRADE ABATEMENT
EXCELLENT HOLD
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	68
THICKNESS (MILS)	9.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For use when building containments and a variety of other applications in remediation, restoration and abatement jobs; Can be used for mold and asbestos removal.



PC 629



**INDUSTRIAL GRADE ABATEMENT
SUPERIOR HOLD
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
THICKNESS (MILS)	11.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For sealing walls, doors and windows in abatement applications; Ideal for use on rugged jobs in warm and cold climates, as well as dry and wet environments.

PC 610



**PERFORMANCE GRADE ABATEMENT
SUPERIOR HOLD
BLENDED RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	56
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	-

For sealing walls, doors and windows in abatement applications; Ideal for use on rugged jobs in warm and cold climates, as well as dry and wet environments.



PC 618C

PC 626



**SPECIALTY GRADE
LUSTERLESS CAMOUFLAGE
OFFICIAL ARMY ACU DIGITAL
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	48
THICKNESS (MILS)	10.0
ELONGATION (%)	20
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For sealing, waterproofing, holding, camouflaging, sound deadening, covering reflective surfaces and patching applications.



CP 327 & PC 608

STUCCO DUCT TAPES



PC 622
PREMIUM GRADE, CLOTH DUCT CONFORMABLE WITH EXCELLENT HOLD NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	12.5
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	40, 56

For protecting window and door frames during stucco applications; Used in high performance motorsports; For heavy duty bundling, holding and splicing.



PC 668
SPECIALTY GRADE, CLOTH DUCT HOLDS STRONG SYNTHETIC/NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	27.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	11.0
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For two- and three-step (scratch, brown and finish) stucco processes where the job requirements dictate the protective barrier be left in place for the entire application.



PC 667
SPECIALTY GRADE, CLOTH DUCT EASY TO TEAR BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	9.0
ELONGATION (%)	15
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	-

For protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals; Use in plastering, stucco, concrete, pool and tile applications.



PC 567
SPECIALTY GRADE, CLOTH DUCT CONFORMABLE TO MOST SURFACES BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	46
THICKNESS (MILS)	8.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	34, 56

For protecting surfaces when pressure washing and applying stucco.



See page 42 for Polyethylene Stucco Masking Tapes



PC 668

HVAC DUCT TAPES



PC 857
UL PRINTED COATED CLOTH HIGH STRENGTH AND HOLD SYNTHETIC RUBBER BLEND ADHESIVE

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	14.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	43, 55, 56, 57

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct.



PC 858CA
UL PRINTED COATED CLOTH HIGH STRENGTH AND HOLD SYNTHETIC RUBBER BLEND ADHESIVE CEC APPROVED

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	14.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 212
APPLICABLE STANDARDS*	43, 55, 56, 57

Used in the HVAC industry to seal, seam and join Class 1 Flex Duct; Approved for use by the California Energy Commission.



PC 609
PERFORMANCE GRADE EXCELLENT HOLD BLENDED RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	22
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	71
THICKNESS (MILS)	10.0
ELONGATION (%)	16
SERVICE TEMPERATURE RANGE (°F)	25 - 200
APPLICABLE STANDARDS*	34, 56

For use in the HVAC industry to repair thermal insulation and flexible ducts, and to seal metal ductwork; Used in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; Used for packaging, bundling, holding, wrapping and waterproofing; Also used for asbestos and mold remediation.



SF 682
SHURFLEX® PROFESSIONAL GRADE FLEXIBLE AND CONFORMABLE NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 56

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, rigid ductboards, air vents, insulation, fibrous filter banks and pollution collection systems.



SF 683
SHURFLEX® PROFESSIONAL GRADE FLEXIBLE AND CONFORMABLE NATURAL RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS (MILS)	10.0
ELONGATION (%)	18
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	35, 56

For use in the HVAC industry for airtight and moisture-free seaming, connecting, splicing, patching and sealing of sheet metal and flex duct, insulation, rigid ductboards, air vents and fiberboard.



MJ 100
PROFESSIONAL GRADE FIBERGLASS MESH WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	75.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	8
THICKNESS (MILS)	9.0
ELONGATION (%)	3.83
SERVICE TEMPERATURE RANGE (°F)	-
APPLICABLE STANDARDS*	-

For reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications; Can also be applied to drywall seams before the application of joint compound.

HEAVY DUTY DUCT TAPES

PC 621



**PROFESSIONAL GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	62
THICKNESS (MILS)	11.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	38, 56

For demanding HVAC applications to hold, seal and seam sheet metal and flex duct, exhaust vents and pre-formed insulation; Can also be used in industrial applications for holding, splicing, protecting and packaging.



P- 670



**HEAVY DUTY DUCT TAPE
POLYETHYLENE COATED BACKING
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	95
THICKNESS (MILS)	11.5
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For sealing and seaming ductwork in the HVAC industry; Can also be used for protection, splicing, bundling, seaming and sealing applications that demand higher tensile strength and easy tear capabilities; For temporary and permanent uses in the auto industry.

PC 721



**EXTREME HOLD PROFESSIONAL GRADE
EXCELLENT CONFORMABILITY
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	32
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	11.5
ELONGATION (%)	24
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	38, 56

For demanding HVAC applications to hold, seal and seam sheet metal; Can also be used for heavy duty industrial applications like holding, bundling, splicing, protecting and packaging.



SPECIALTY DUCT TAPES

PC 623



**ECONOMICAL NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES**

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	58
THICKNESS (MILS)	11.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 50

For a variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



PC 624



**NUCLEAR GRADE
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
MEETS ASME NQA-1 GUIDELINES**

TENSILE (LBS/IN WIDTH)	36
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS (MILS)	13.0
ELONGATION (%)	14
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	2, 3, 50

For a more robust variety of purposes in the construction, operation and maintenance of nuclear power facilities; Can also be used for holding to stainless steel pipes, color-coding and sealing endcaps on stainless steel pipes.



PC 625



**MILITARY SPEC LUSTERLESS
EXCELLENT HOLDING POWER
NATURAL RUBBER ADHESIVE
ASTM D5486M TESTED**

TENSILE (LBS/IN WIDTH)	45
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	12.5
ELONGATION (%)	12
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	12

For use as a premium, waterproof packaging tape that meets government specifications; Can also be used for moisture-proofing cartons, canisters and tubing.



PC 657®



**HEAVY DUTY PROFESSIONAL GRADE
EXCELLENT HOLD
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	29
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	104
THICKNESS (MILS)	14.5
ELONGATION (%)	11
SERVICE TEMPERATURE RANGE (°F)	40 - 200
APPLICABLE STANDARDS*	44, 56

For use in high performance motorsports applications, pre-manufactured housing and RV assembly, critical industrial applications and for protection during sandblasting and metal-peening operations.



PC 658



**SUPER BOTTOM BOARD
SUPERIOR ADHESION AND HOLD
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	125
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	41, 56

For seaming and sealing bottom board materials in pre-manufactured housing and RV assembly, set-up and maintenance; Can also be used to protect surfaces in metal-peening operations.



PC 745



**T-REX® SUPER-TOUGH, ALL-WEATHER
QUICK STICK
NATURAL RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	52
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
THICKNESS (MILS)	17.0
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	32 - 200
APPLICABLE STANDARDS*	-

For use on rough or dirty surfaces; For heavy duty repairs that demand a ferociously strong hold; Can also be used as a bottom board tape in the manufactured housing industry.



T-REX®/PC 745

COATED CLOTH TAPES

P- 628



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING HIGH TENSILE AND HOLDING POWER SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For use in the convention, hospitality, exhibition and trade show industries, and for general use in the audio/visual, television, photography, theatrical and motion picture industries; Used for protection and book-binding, color-coding, labeling and stage marking; Also used in the HVAC industry.

P- 660



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING HIGH TENSILE AND HOLDING POWER SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	75
THICKNESS (MILS)	10.75
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	-

For bundling or securing wires, cables and props in the audio/visual, television, photography, theatrical and motion picture industries; Also used for color-coding, labeling, marking and book-binding applications; Will fluoresce under black light.

P- 661



GLOW-IN-THE-DARK GAFFER'S WRITABLE/PRINTABLE HIGH ADHESION AND TACK SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	13.0
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	5, 17

Used for a multitude of applications, including safety marking, in the audio/visual, television, photography, theatrical and motion picture industries; Also used for labeling and marking various objects, such as: safety/critical equipment, exit/directional signage, tripping hazards, access handles, sports equipment and tools.



P- 665



PROFESSIONAL GRADE GAFFER'S MATTE-FINISH BACKING HIGH ADHESION AND TACK SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	11.0
ELONGATION (%)	4
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For demanding applications that require clean removal in the audio/visual, television, photography, theatrical and motion picture industries, such as holding wiring, lighting and props.

P- 672



PREMIUM GRADE GAFFER'S LIGHT DUTY MATTE-FINISH BACKING SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	77
THICKNESS (MILS)	12.0
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For sealing containers and protection from welding splatter; Can also be used for general holding, bundling and temporary repair applications.

P- 691



PREMIUM GRADE GAFFER'S MEDIUM DUTY MATTE-FINISH BACKING SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	12.25
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20, 48

For sealing containers and rooms, abrasion protection, and general holding, bundling and repair applications; Meets water leachable requirements for detrimental elements (Fl & Br <250PPM; S & C<500PPM) in accordance with MIL-STD-2041D.

P- 68



PREMIUM GRADE GAFFER'S HEAVY DUTY MATTE-FINISH BACKING SYNTHETIC RUBBER ADHESIVE

TENSILE (LBS/IN WIDTH)	70
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	83
THICKNESS (MILS)	12.5
ELONGATION (%)	6
SERVICE TEMPERATURE RANGE (°F)	50 - 180
APPLICABLE STANDARDS*	20

For book-binding, color-coding and gaffer's applications; For sealing containers and rooms, abrasion protection, and general holding, bundling and repair applications.



P- 665



FOIL, FILM & FOAM TAPES

WE KNOW your reputation is on the line. That's why we offer a comprehensive assortment of foil, film and foam tapes that are engineered for performance in a range of jobs, from HVAC and insulation to electrical, safety marking and more. With options that meet the code, perform in the cold and deliver superior results, Shurtape has you covered with the tapes you need to ensure your work exceeds your **EXACTING STANDARDS**.

ALUMINUM FOIL TAPES

AF 100



2-MIL DEAD-SOFT ALUMINUM FOIL FLEXIBLE AND EASY TO USE ACRYLIC-BASED ADHESIVE TRADITIONAL LINER

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	46, 54, 55, 56, 57

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.



AF 100E



2-MIL DEAD-SOFT ALUMINUM FOIL FLEXIBLE AND EASY TO USE ACRYLIC-BASED ADHESIVE EASYPEEL® LINER

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS WITHOUT LINER (MILS)	4.2
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	46, 54, 55, 56, 57

For joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct.



AF 914CT



1.5-MIL ALUMINUM FOIL SUPERIOR STABILITY ACRYLIC-BASED ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	12
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	3.4
ELONGATION (%)	3
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 56

For joining and sealing aluminum-backed and fibrous insulation and metal ductwork in temperatures ranging from -20 F to 260 F; Also used to repair metal and sheet metal.



ALUMINUM FOIL TAPES

AF 912



1.5-MIL DEAD-SOFT ALUMINUM FOIL SOLVENT-FREE SYNTHETIC RUBBER ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS WITHOUT LINER (MILS)	3.8
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	38, 56

For sealing and joining aluminum-backed duct wrap; Also used for temporary metal repair.

AF 973



2-MIL DEAD-SOFT ALUMINUM FOIL SOLVENT-FREE SYNTHETIC RUBBER ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	90
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	2
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	36, 56

For sealing and joining aluminum-backed duct wrap, creating water and vapor barriers, and for temporary metal repair.

AF 982



FOIL/SCRIM/KRAFT (FSK) SOLVENT-FREE SYNTHETIC RUBBER ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	40
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	6.6
ELONGATION (%)	1
APPLICATION TEMPERATURE RANGE (°F)	32 - 230
APPLICABLE STANDARDS*	40, 56

For maximum-strength sealing, seaming and joining scrim-reinforced pipe and duct insulation in all weather conditions.

AF 975CT



2-MIL ALUMINUM FOIL SUPERIOR STABILITY ACRYLIC-BASED ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	18
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	4.0
ELONGATION (%)	3
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	34, 56

For use in temperatures ranging from -20 F to 260 F when joining and sealing aluminum-backed or fibrous insulation and metal ductwork; Can also be used when repairing metal and sheet metal.



SF 685



PRINTED SHURMASTIC® FOIL FORMS A PERMANENT BOND BUTYL RUBBER ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	255
THICKNESS (MILS)	17.0
ELONGATION (%)	560
SERVICE TEMPERATURE RANGE (°F)	-20 - 200
APPLICABLE STANDARDS*	45, 51, 53, 56

For indoor or outdoor use to seal Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



SF 686



UL PRINTED SHURMASTIC® FOIL INSTANT, WATER-RESISTANT GRIP BUTYL RUBBER ADHESIVE LINERED

TENSILE (LBS/IN WIDTH)	23.8
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	111
THICKNESS (MILS)	17.0
ELONGATION (%)	-
SERVICE TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	51, 53, 55, 56, 57

For airtight and moisture-free sealing of Class 1 Flex Duct, sheet metal and duct wrap vapor barriers; Also approved for subgrade application on PVC-coated duct; Paintable with paint recommended for aluminum.



DC 181



UL PRINTED BOPP FILM EXCELLENT CONFORMABILITY ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	31
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	38
THICKNESS (MILS)	2.7
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	-10 - 210
APPLICABLE STANDARDS*	46, 55, 56, 57

For use on Class 1 Flex Duct for connecting, joining, sealing and patching flexible air ductwork.



FF 100



UL PRINTED BOPP FILM EXCELLENT CONFORMABILITY WATER-BASED ACRYLIC ADHESIVE

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	3.0
ELONGATION (%)	150
SERVICE TEMPERATURE RANGE (°F)	-14 - 176
APPLICABLE STANDARDS*	34, 55, 56, 57

For seaming and sealing reflective insulation; Can also be used to seal reflective insulation used as a radiant barrier inside an attic, crawlspace, side wall or other area inside a home or building; Delivers a permanent, airtight seal for the life of the system.



FF 100

COMPOSITE TAPES

AF 984CT



FOIL/SCRIM/KRAFT (FSK)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	34
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	7.4
ELONGATION (%)	3
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	37, 56

For sealing seams in scrim-reinforced duct insulation.



AF 990CT



ALL SERVICE JACKET (ASJ)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	39, 56

For use in cold and dual temperature systems to seal, seam and join scrim-reinforced pipe and duct insulation.



AF 995CT



ALL SERVICE JACKET+ (ASJ+)
SUPERIOR STABILITY
ACRYLIC-BASED ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	50
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	6.7
APPLICATION TEMPERATURE RANGE (°F)	-20 - 260
APPLICABLE STANDARDS*	56

For permanently sealing butt joints on ductboard and pipe insulation wrapped with ASJ+ faced backing in temperatures ranging from -20 F to 260 F.



MB 100



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	37
THICKNESS WITHOUT LINER (MILS)	6.9
ELONGATION (%)	5
APPLICATION TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	56

For seaming and sealing VR-R plus insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 200



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	6.7
ELONGATION (%)	5
APPLICATION TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	56

For medium duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



MB 300



WHITE METALIZED POLYPROPYLENE
PERMANENT BOND
ACRYLIC ADHESIVE
LINERED

TENSILE (LBS/IN WIDTH)	41
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	64
THICKNESS WITHOUT LINER (MILS)	8.3
ELONGATION (%)	4
APPLICATION TEMPERATURE RANGE (°F)	-20 - 220
APPLICABLE STANDARDS*	56

For heavy duty seaming and sealing White Metalized Polypropylene insulation backings; Offers a seamless match when sealing, seaming and joining metal building insulation.



ELECTRICAL TAPES

EV 57B & EV 57C



GENERAL PURPOSE GRADE
UL LISTED ELECTRICAL
CONFORMABLE AND HAND-TEARABLE
PVC FILM

TENSILE (LBS/IN WIDTH)	16
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	24
THICKNESS (MILS)	7.0
ELONGATION (%)	250
SERVICE TEMPERATURE RANGE (°F)	32 - 176
APPLICABLE STANDARDS*	27, 57

For use in a variety of indoor/outdoor mechanical and electrical applications, including color-coding and phasing tasks.



EV 77B & EV 77C



PROFESSIONAL GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	20
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	7.0
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 57

For all-weather insulating and splicing applications, jacketing on high voltage splices and repairs, and color-coding and phasing tasks.



EV 97B



PREMIUM GRADE
UL LISTED ELECTRICAL
HIGH TENSILE
PVC FILM

TENSILE (LBS/IN WIDTH)	26
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	28
THICKNESS (MILS)	8.5
ELONGATION (%)	300
SERVICE TEMPERATURE RANGE (°F)	0 - 220
APPLICABLE STANDARDS*	27, 57

For primary insulation of electrical splices up to 600 V; Also used as a jacketing on high voltage splices and repairs; Can be used when wrapping wire harnesses and cables.



EV 77B

LR 117



HIGH VOLTAGE
HIGH ELONGATION
LINERLESS EPR

TENSILE (PSI)	400
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS (MILS)	30.0
ELONGATION (%)	760
CONTINUOUS OPERATING TEMPERATURE MAX (°F)	194
APPLICABLE STANDARDS*	6, 7, 14

For insulating splices and terminations up to 69,000 V; Also used for insulating and protecting bus bars up to 35,000 V; Can be used to seal electrical splices from moisture; Also for jacketing for applications greater than 69,000 V; Compatible with all extruded dielectric cable insulations.



POLYETHYLENE/PVC FILM TAPES

BT 100



**GENERAL PURPOSE BARRICADE
2-IN LETTERS ARE EASY TO READ
RESISTS SAGGING
ADHESIVE-FREE**

THICKNESS (MILS)	2 - 3
APPLICABLE STANDARDS*	-

For marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries.

VP 410



**GENERAL PURPOSE GRADE
LINE SET
SPVC FILM**

TENSILE (LBS/IN WIDTH)	13
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	5.25
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	22

For floor, lane and aisle marking, color-coding and identification applications; Also used in the HVAC industry to wrap line sets, seam Rubatex and Armaflex, and insulate air ducts and underground pipes; Meets OSHA color-coding requirements.



VP 415



**GENERAL PURPOSE GRADE
WARNING STRIPE
SPVC FILM**

TENSILE (LBS/IN WIDTH)	15
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	12
THICKNESS (MILS)	6.6
ELONGATION (%)	200
SERVICE TEMPERATURE RANGE (°F)	20 - 140
APPLICABLE STANDARDS*	22

For lane marking and identification of safety zones and hazard areas; Resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion; Meets OSHA color-coding requirements.



PE 100



**FLOORMATE®
LOW ADHESION
ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	11
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	15
THICKNESS (MILS)	4.6
ELONGATION (%)	500
MAXIMUM SERVICE TEMPERATURE (°F)	160
APPLICABLE STANDARDS*	-

For temporary use on properly prepared and cured wood floors; Also used as a gym floor marking tape for creating temporary lines and boundaries; Can also be used on other hard flooring surfaces, including sheet vinyl, wood laminates, engineered hardwood, tile, marble and granite.

SPECIALTY TAPES

RT 700



**T-REX® CLEAR REPAIR
HAND-TEARABLE
ALL-WEATHER
SOLVENT ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	23.5
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	100
HOLDING POWER TO STEEL (MINUTES)	1,800+
THICKNESS (MILS)	6.8
ELONGATION (%)	430
SERVICE TEMPERATURE RANGE (°F)	-5 - 150
APPLICABLE STANDARDS*	-

For quick and discreet repairs to a variety of surfaces, including those that require a water-resistant seal; Can be applied to wet* or dry surfaces; Can also be applied to rough surfaces and at below freezing temperatures.



*Follow recommended usage instructions for best results in wet-stick applications.

IT 100



**GENERAL PURPOSE GRADE
FOAM PIPE WRAP INSULATION
ADHERES FIRMLY TO ALL METALS
ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH) (LONGITUDINAL)	6.0
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	-
THICKNESS WITHOUT LINER (MILS)	118.1
ELONGATION (%) (MACHINE DIRECTION)	126
SERVICE TEMPERATURE RANGE (°F)	-20 - 180
APPLICABLE STANDARDS*	-

For hot and cold pipe insulation applications - cover hot pipes to prevent heat loss and cold pipes to prevent condensation drip; Thermal conductivity is 0.28 at 75 F, in accordance with ASTM C-177.

PE 333



**POLYETHYLENE FILM
SERRATED OR STRAIGHT EDGE
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	70
THICKNESS (MILS)	7.0
ELONGATION (%)	80
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting when UV resistance is not required; Also for masking curved surfaces; Used for seaming under slab vapor barriers; Also used in the abatement, restoration and remodeling industries to hold poly-sheeting when building containments.

PE 444



**POLYETHYLENE FILM
MAINTAINS A WATERTIGHT SEAL
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	80
THICKNESS (MILS)	7.0
ELONGATION (%)	76
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces, such as windows and doors, during stucco application and painting; Delivers residue-free removal for a variety of applications.



PE 555



**POLYETHYLENE FILM
EXCELLENT TEARABILITY
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	27
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	92
THICKNESS (MILS)	9.0
ELONGATION (%)	94
SERVICE TEMPERATURE RANGE (°F)	32 - 160
APPLICABLE STANDARDS*	-

For masking surfaces during stucco application and painting; Can also be used for surface protection, color-coding, splicing and seaming on pipe-fitting covers; Delivers residue-free removal for a variety of applications.



PW 100



**GENERAL PURPOSE GRADE
PVC PIPE WRAP
CORROSION/MOISTURE RESISTANT
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	25
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	20
THICKNESS (MILS)	10.0
ELONGATION (%)	200
APPLICATION TEMPERATURE RANGE (°F)	14 - 176
SERVICE TEMPERATURE RANGE (°F)	32 - 104
APPLICABLE STANDARDS*	-

For corrosion protection of under and above ground metal and plastic pipe installations.

HW 300



**HOUSEWRAP/SHEATHING
HAND-TEARABLE
WATER-BASED ACRYLIC ADHESIVE
CCMC-CERTIFIED**

TENSILE (LBS/IN WIDTH)	30
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS (MILS)	3.0
ELONGATION (%)	162
APPLICATION TEMPERATURE RANGE (°F)	14 - 176
APPLICABLE STANDARDS*	18, 34, 56

For sealing seams and joints on all types of housewrap, sheathing, insulation and vapor barrier materials used in residential and commercial construction applications.



LS 300



**UV-RESISTANT LINE SET
EASY TO UNWIND
ACRYLIC-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	37
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	35
THICKNESS (MILS)	2.85
ELONGATION (%)	180
SERVICE TEMPERATURE RANGE (°F)	-35 - 210
APPLICABLE STANDARDS*	-

For taping outdoor HVAC components.



See page 30 for Stucco Duct Tapes



DOUBLE-COATED TAPES

WE KNOW you demand versatility to get the job done. That's why we have engineered a comprehensive assortment of double-coated tapes, including paper, film, cloth and transfer adhesive options. Whether you're mounting, splicing, joining or laminating, these tapes have one thing in common: an unsurpassed level of **QUALITY**.

DOUBLE-COATED PAPER TAPES

DF 63



**GENERAL PURPOSE GRADE
CREPE PAPER
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	19
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	24

For mounting, holding, splicing, tabbing and fastening a variety of substrates.

DF 65



**GENERAL PURPOSE GRADE
FLAT PAPER
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	33
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	65
THICKNESS WITHOUT LINER (MILS)	5.0
ELONGATION (%)	3
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	25

For mounting, holding, splicing, tabbing and fastening applications that demand aggressive adhesion.

DT 200



**PREMIUM PERFORMANCE GRADE
SOLVENT-BASED ACRYLIC ADHESIVE
NONWOVEN TISSUE**

TENSILE (LBS/IN WIDTH)	4.6
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	55
THICKNESS WITHOUT LINER (MILS)	4.5
ELONGATION (%)	3.5
SERVICE TEMPERATURE RANGE (°F)	-20 - 212
APPLICABLE STANDARDS*	-

For high-speed splicing in the corrugated cardboard production process in temperatures up to 400 F; Can also be used as a mounting and laminating system for irregularly shaped metals, foams, foils and nameplates; For manual applications.

DOUBLE-COATED FILM TAPES

DP 380



**GENERAL PURPOSE GRADE
POLYESTER (PET) FILM
SOLVENT-BASED ACRYLIC ADHESIVE**

TENSILE (LBS/IN WIDTH)	14.3
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	60
THICKNESS WITHOUT LINER (MILS)	4.4
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	-20 - 257
APPLICABLE STANDARDS*	-

For mounting banners, light signs, window blinds, emblems and nameplates; Also used for long-term or permanent bonding and attachment applications, including POP displays and laminating materials.

DP 401



**PROFESSIONAL GRADE
POLYESTER (PET) FILM
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	14
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS^)	124
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES^)	142
THICKNESS WITHOUT LINER (MILS)	4.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For polyethylene (PE) foam fabrication and lamination processes; Ideal for packaging applications that require cushioning, protection or stabilization of contents; Can also be used with die-cuts, gaskets, POP merchandising and shelf displays.

^LS=LINER SIDE; ^ES=EXPOSED SIDE

DOUBLE-COATED CLOTH

DF 545



**PREMIUM PERFORMANCE GRADE
POLYESTER/COTTON BLEND CLOTH
RUBBER-BASED ADHESIVE**

TENSILE (LBS/IN WIDTH)	28
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	52
THICKNESS WITHOUT LINER (MILS)	13.5
ELONGATION (%)	9
SERVICE TEMPERATURE RANGE (°F)	50 - 200
APPLICABLE STANDARDS*	5

For securing carpet and pad at convention centers, arenas and hotels; Also used for general purpose hanging applications in the construction and abatement industries; Can also be used for splicing applications.



GG 200



**GOLF GRIP
RUBBER-BASED ADHESIVE
CREPE PAPER**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	50
THICKNESS WITHOUT LINER (MILS)	6.5
ELONGATION (%)	10
SERVICE TEMPERATURE RANGE (°F)	50 - 150
APPLICABLE STANDARDS*	-

For factory and clubhouse golf grip installation; Can also be used for mounting, holding, splicing, tabbing and fastening a variety of substrates when an aggressive, double-sided tape is required.

DS 154




**PROFESSIONAL GRADE CONTAINMENT
EXCELLENT HOLD
FINE STRUCTURED CREPE (FSC)
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	21
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (LS^)	60
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH) (ES^)	27
THICKNESS WITHOUT LINER (MILS)	8.5
ELONGATION (%)	9
SERVICE TEMPERATURE RANGE (°F)	32 - 120
APPLICABLE STANDARDS*	-

For holding poly-sheeting and other protective materials when creating high-performance containment systems; Use for restoration, abatement and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more.



^LS=LINER SIDE; ^ES=EXPOSED SIDE

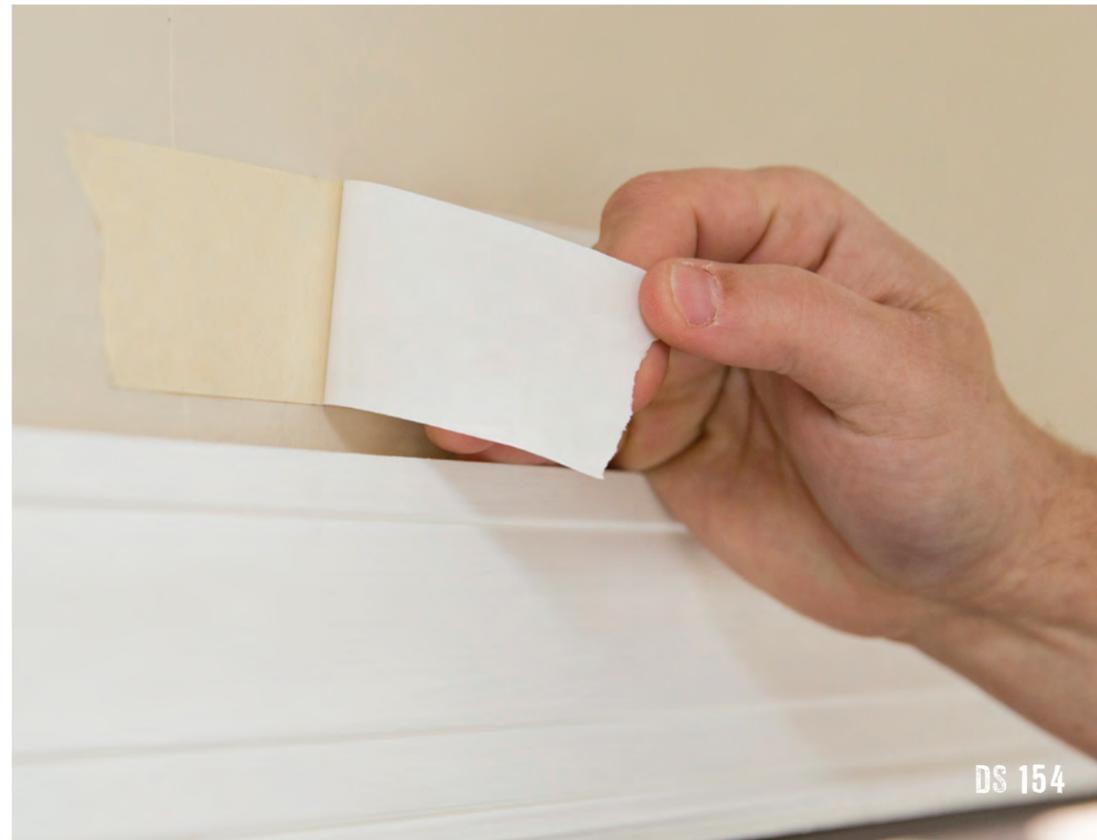

DS 154

DP 391



**PROFESSIONAL GRADE
POLYESTER (PET) FILM
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	23
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	82
THICKNESS WITHOUT LINER (MILS)	3.7
ELONGATION (%)	120
SERVICE TEMPERATURE RANGE (°F)	32 - 150
APPLICABLE STANDARDS*	-

For mounting, bonding and fastening a wide variety of substrates, including low surface energy plastics and coatings; Used for trim, profile and extrusion mounting; Can be used in non-direct UV exposure applications, such as vinyl and painted window frames, that demand clean removal; Also used for mounting indoor window kits.

DF 642



**INDUSTRIAL GRADE
POLYESTER/COTTON BLEND CLOTH
SYNTHETIC RUBBER ADHESIVE**

TENSILE (LBS/IN WIDTH)	32
ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	12.0
ELONGATION (%)	8
SERVICE TEMPERATURE RANGE (°F)	50 - 225
APPLICABLE STANDARDS*	-

For carpet and pad installation at convention centers, arenas and hotels; Used for general purpose holding and mounting applications; Can also be used to hold signs and dispensers for POP merchandising.

TRANSFER ADHESIVE TAPES

TA 450



**GENERAL PURPOSE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE**

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	25
THICKNESS WITHOUT LINER (MILS)	1.6
SERVICE TEMPERATURE RANGE (°F)	-22 - 302
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.



TG 356



**PREMIUM PERFORMANCE GRADE
RESISTS HUMIDITY, MOST SOLVENTS
ACRYLIC-BASED ADHESIVE**

ADHESION TO STAINLESS STEEL (OZ/IN WIDTH)	32
THICKNESS WITHOUT LINER (MILS)	2.0
SERVICE TEMPERATURE RANGE (°F)	-60 - 250
APPLICABLE STANDARDS*	-

For mounting, holding, joining and splicing various substrates, including paper, cardboard, textiles, plastics, leather, wood, glass and painted surfaces; For use on displays, POS, posters, etc.; Use with an adhesive transfer gun to make almost any surface self-adhesive. Reverse wound on a 1-in I.D. core.



DISPENSER

SD 950



**ADHESIVE TRANSFER GUN
PISTOL-GRIP
EASY TO LOAD**

For use with reverse wound adhesive transfer tape to quickly and easily make almost any surface self-adhesive; For mounting, holding, joining and splicing paper, cardboard, plastics, wood, leather, glass and painted surfaces; Can also be used when gift wrapping; For use with 0.75 in maximum width rolls.

RECOMMENDED PRODUCTS
TG 356



**SD 950 DISPENSER &
TG 356**

SHURTAPE INNOVATIONS

New or reinvented products that stay **TRUE TO YOUR WORK**

CP 327
BLUE CONTAINMENT TAPE



Page 9

PC 608
POLY-HANGING DUCT TAPE



Page 29

SHURGRIP® SERIES
CO-EXTRUDED DUCT TAPES



Page 26

PC 745
T-REX® SUPER-TOUGH CLOTH TAPE



Page 32

FE-2 & FE-3
FOLDED-EDGE HAND DISPENSER



Page 21

FLEXPACK
TAPING SYSTEM



Page 21

FT 36
FILAMENT TAPE DISPENSER



Page 22

FF 100
REFLECTIVE INSULATION FILM TAPE



Page 39

MB SERIES
METAL BUILDING INSULATION TAPES



Page 40

EV SERIES
UL LISTED ELECTRICAL TAPES



Page 41

LR 117
LINERLESS RUBBER TAPE



Page 41

RT 700
T-REX® CLEAR REPAIR TAPE



Page 43

APPLICABLE STANDARDS

1 AMS-T-21595	20 CID A-A-1586A	39 FSI 5/SDI 10
2 ANSI No. 45.2.2	21 CID A-A-1684C	40 FSI 10/SDI 10
3 ASME NQA-1	22 CID A-A-1689B, Type I, Class 2	41 FSI 15/SDI 20
4 ASTM D 1974/D 1974M-16	23 CID A-A-1689B, Type II	42 FSI 15/SDI 25
5 ASTM D 4236	24 CID A-A-180C, Type II, Grade A	43 FSI 15/SDI 30
6 ASTM D 4325	25 CID A-A-180C, Type II, Grade B	44 FSI 15/SDI 40
7 ASTM D 4388	26 CID A-A-55809	45 FSI 20/SDI 40
8 ASTM D 5330, Type II	27 CSA 22.2	46 FSI 25/SDI 50
9 ASTM D 5486M-12, Type I, Class 2	28 FDA Indirect Contact CFR 21, 174.5	47 L-T-80B
10 ASTM D 5486M-12, Type II, Class 2	29 FDA Indirect Contact CFR 21, 175.105	48 MIL-STD-2041D
11 ASTM D 5486M-12, Type III	30 FDA Indirect Contact CFR 21, 176.170	49 MIL-T-23397C
12 ASTM D 5486M-12, Type IV	31 FDA Indirect Contact CFR 21, 176.180	50 NRC Guide 1.38
13 ASTM D 5486M-12, Type V	32 FDA Indirect Contact CFR 21, 177.1520	51 Pressure Classes SMACNA 1/2, 1, 2, 3, 4 & 6
14 ASTM D 570	33 FDA Indirect Contact CFR 21, 177.1630	52 SAE-AMS-T-23397
15 ASTM D 6123/D 6123M-97 (2012), Type I	34 FSI 0/SDI 0	53 Seal Classes A, B, C
16 ASTM D 6123/D 6123M-97 (2012), Type II	35 FSI 0/SDI 5	54 UL 181A-P
17 ASTM E 2072	36 FSI 0/SDI 10	55 UL 181B-FX
18 CCMC Report No.: 13401-R	37 FSI 5/SDI 0	56 UL 723
19 CID A-A-113D, Type I, Class A	38 FSI 5/SDI 5	57 UL Listed

PRODUCT INDEX

AF 100	38	CP 150	4	FP 96	8	IT 100	43	PC 619	28	SD 931	23
AF 100E	38	CP 327	9	FP 97	8	JLAR	19	PC 621	32	SD 932	22
AF 912	39	CP 400	7	FP 115	8	LR 117	41	PC 622	30	SD 934	22
AF 914CT	38	CP 450	7	FP 202	8	LS 300	43	PC 623	33	SD 935	22
AF 973	39	CP 500	7	FP 227	9	MB 100	40	PC 624	33	SD 936	22
AF 975CT	38	CP 631	6	FP 726	9	MB 200	40	PC 625	33	SD 937	23
AF 982	39	CP 650	7	FT 36	22	MB 300	40	PC 626	28	SD 950	48
AF 984CT	40	CP 743	9	GG 200	46	MJ 100	31	PC 629	29	SD 955	23
AF 990CT	40	CP 905	7	GP 100	16	P-68	34	PC 657®	32	SD 999	23
AF 995CT	40	CT 109	19	GS 490	17	P-628	34	PC 658	32	SF 682	31
AP 15	19	DC 181	39	GS 496	14	P-660	34	PC 667	30	SF 683	31
AP 101®	15	DF 63	46	GS 500	17	P-661	34	PC 668	30	SF 685	38
AP 180®	15	DF 65	46	GS 501	17	P-665	35	PC 721	32	SF 686	38
AP 201®	15	DF 545	47	GS 521	17	P-670	32	PC 745	32	SP 5000	23
AP 301®	15	DF 642	47	GS 531	17	P-672	34	PC 857	31	SP 7000	21
AP 401®	15	DP 380	47	HP 100®	12	P-691	34	PC 858CA	31	SP 8000	21
BT 100	42	DP 391	47	HP 132®	13	PC 460	26	PE 100	43	TA 450	48
CF 120	4	DP 401	47	HP 200®	12	PC 567	30	PE 333	42	TG 356	48
CF 160	4	DS 154	46	HP 232®	13	PC 589	26	PE 444	42	VF 719	19
CF 740	7	DT 200	46	HP 235	13	PC 590	27	PE 555	42	VP 410	42
COL 00	5	EV 57B	41	HP 240	14	PC 593	26	PP 802	18	VP 415	42
CP 27®	4	EV 57C	41	HP 250	14	PC 595	27	PP 803	18	WP 100	16
CP 60®	4	EV 77B	41	HP 260	14	PC 599	26	PP 807	19	WP 200	16
CP 66®	5	EV 77C	41	HP 300®	12	PC 600C	27	PP 808	19	WP 250	16
CP 83	6	EV 97B	41	HP 400®	12	PC 600S	27	PP 810	18	WP 300	16
CP 101	6	FE-2	21	HP 460	14	PC 608	29	PP 815	18	WP 400	16
CP 102	5	FE-3	21	HP 500®	12	PC 609	31	PS 748	17		
CP 105	6	FF 100	39	HP 560	14	PC 610	29	PW 100	43		
CP 106	6	FlexPack	21	HP 800	12	PC 618C	28	RT 700	43		
CP 107	5	FP 17	9	HW 300	43	PC 618S	28	SD 930	23		

LOCATIONS

U.S. CORPORATE HEADQUARTERS

Shurtape Technologies, LLC
 1712 8th Street Drive SE
 Hickory, NC 28602 USA
 Phone: (828) 322-2700
 (888) 442-8273
 Fax: (828) 322-4029
 Email: custservice@shurtape.com
 Website: www.shurtape.com

SHURTECH BRANDS, LLC

32150 Just Imagine Drive
 Avon, OH 44011 USA
 Phone: (440) 937-7000
 (800) 321-1733
 Fax: (440) 937-7077

MEXICO

Shurtape México, S. de R.L. de C.V.
 Paseo de la Constitución #11
 Fracc. Ind. Peñuelas
 CP 76148, Queretaro, Qro. México
 Phone: +52 (442) 220-6367
 Fax: +52 (442) 220-6366
 Email: pmartinez@shurtapemexico.com

SOUTH AMERICA

Shurtape Perú S.A.
 Calle Minería 141
 Santa Anita, Lima 43
 Perú
 Phone: +51 (1) 416-3400
 Fax: +51 (1) 383-0476
 Email: ventas@shurtapeperu.com
 Website: www.shurtapeperu.com

UNITED KINGDOM

Shurtape UK Ltd.
 39 Mark Road
 Hemel Hempstead
 Hertfordshire, HP2 7DN UK
 Phone: +44 (0)1442 275312
 Fax: +44 (0)1442 275301
 Email: info@shurtapeuk.com
 Website: www.shurtape.co.uk

EUROPE

Kip GmbH
 Schlavenhorst 9 (Industriepark)
 D-46395 Bocholt, Germany
 Phone: +49 2871-23466-2327
 Fax: +49 2871-23466-2332
 Email: export@kip-tape.com
 Website: www.kip-tape.com

MIDDLE EAST

Shurtape Ved Ltd.
 Jebel Ali Free Zone
 Dubai, United Arab Emirates
 Phone: +971 (4) 881-3155
 Fax: +971 (4) 881-3166
 Fax: +971 (4) 883-1974
 Email: shurtape@emirates.net.ae

ASIA

Shurtape Technologies (Changshu) Co. Ltd.
 Changshu Southeast Economic
 Development Zone
 No. 301 Yintong Road
 Jiangsu, China 215500
 Phone: +86 (512) 5235-9500
 Fax: +86 (512) 5235-9528
 Email: info@shurtape.com.cn

UNITED STATES DISTRIBUTION CENTERS

North Carolina
 3389 Catawba Industrial Place
 Catawba, NC 28609 USA
 Phone: (828) 322-2700
 (888) 442-8273

Arizona

First Commerce Center
 725 N 73rd Avenue, Suite 112
 Phoenix, AZ 85043 USA
 Phone: (623) 463-5886
 (800) 342-8273
 Fax: (623) 463-5809

Oklahoma

4800 Partnership Drive
 Oklahoma City, OK 73131
 Phone: (405) 475-0202
 Fax: (405) 475-0211

Ontario, Canada

6685 Kennedy Rd. Suite 3
 Mississauga, ON
 Canada L5T 3A5
 Phone: (888) 442-8273
 Fax: (905) 696-8176

WARRANTY INFORMATION

Shurtape Technologies, LLC, guarantees its products to be in compliance with acceptable standards for material and workmanship, but limits its obligation under this warranty to replacement or, at its option, reimbursement of the purchase price of returned merchandise shown to its satisfaction to have been defective by such standards at the time it was shipped by Shurtape Technologies, LLC. Shurtape Technologies, LLC, neither makes nor authorizes, nor shall be bound to any other warranty of merchantability, and under no circumstances will it be liable for any loss, damage, expense or consequential damage or loss of any kind either in tort or contract, arising directly or indirectly out of or in connection with the use of or inability to use its products.

Product literature, specifications, product and test reports, and other descriptive and advertising material and information are based on research testing and are believed to be reliable but constitute no part of this warranty, which is exclusively and strictly limited to the foregoing. Shurtape products are sold on the understanding that the buyer has determined or will determine the suitability of the product for buyer's purposes, and is reminded that some materials are sensitive to adhesive-based products and discretion should be used in their application.

No agent or representative is authorized to give any guarantee or make any statement contrary to or inconsistent with this warranty.

All trademarks listed are the property of Shurtape Technologies, LLC, unless otherwise noted.





Shurtape®

TRUE TO YOUR WORK®

**SHURTAPE TECHNOLOGIES, LLC
PO BOX 1530
HICKORY, NC 28603-1530 USA**

**SHURTAPE.COM
1.888.442.TAPE
CUSTSERVICE@SHURTAPE.COM**

ISO 9001-CERTIFIED QUALITY SYSTEM