




1002EFRMH - 6004ERMH Steel Grip Electronic Torque Wrench



PRODUCT DETAILS

- Sealed head keeps contamination out and lubrication in for better performance and longer tool life
- Handles are durable, lightly knurled for a tough, non-slip grip
- Dual Progressive LEDs allows user to view active torque readings and to anticipate torque target for more accurate torque
- Automatically compensates for flex related torque variances
- Easy to read large LCD screen, LED indicator lights, audible beep and handle vibrations work together to signal when torque is within the targeted range
- Rugged all steel body is design to stand up to industrial use and each wrench is backed by a 1 year warranty
- Torque measured in seven modes ft-lb, in-lb, Nm, dNm, kg-cm, angle and torque then angle
- Fully programmable with 10 memory presets
- Angle Accuracy: (+/- 1% of reading) + (+/- 1 DEG @ Angle Velocity >10 DEG/SEC < 180 DEG/SEC) + (+/- 1 DEG for test fixture)
- Torque accuracy: +/- 2% CW, +/- 3% CCW indicated value, 20% to 100 % of full scale
- Torque accuracy: +/-4% CW, +/-6 CCW indicated value, 10% to 19% of full scale
- Torque accuracy: +/- 8% CW, +/- 10% CCW indicated value, 5% to 9% of full scale
- Includes: Blow Molded Storage Case

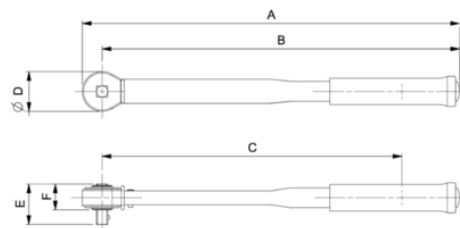

PRODUCT ATTRIBUTES

Product						E	D	A	
2401EFRMH	1/4 in	36	12 - 240 lb·in	1 - 20 lb·ft	1.36-27.12 Nm	7/16 in	7/8 in	11-2/3 in	0,93 lb
12002EFRMH	3/8 in	36	60-1,200 lb·in	5-100 lb·ft	7-135 Nm	1-1/16 in	1-3/16 in	15-1/2 in	1,6 lb
1002EFRMH	3/8 in	36	60-1,200 lb·in	5-100 lb·ft	6.8-135.0 Nm	9/16 in	1-1/4 in	19 in	2,85 lb
2503EFRMH	1/2 in	36	150-3,000 lb·in	12.5-250 lb·ft	16.9-339 Nm	3/4 in	1-5/8 in	26-2/3 in	4,35 lb
6004EFMH	3/4 in	36	360-7,200 lb·in	30-600 lb·ft	40.7-813.5 Nm	1-1/4 in	2-1/2 in	48-2/3 in	10,95 lb